


Rury rozwidlone 60° stożkowe

Hosenrohre 60° konisch

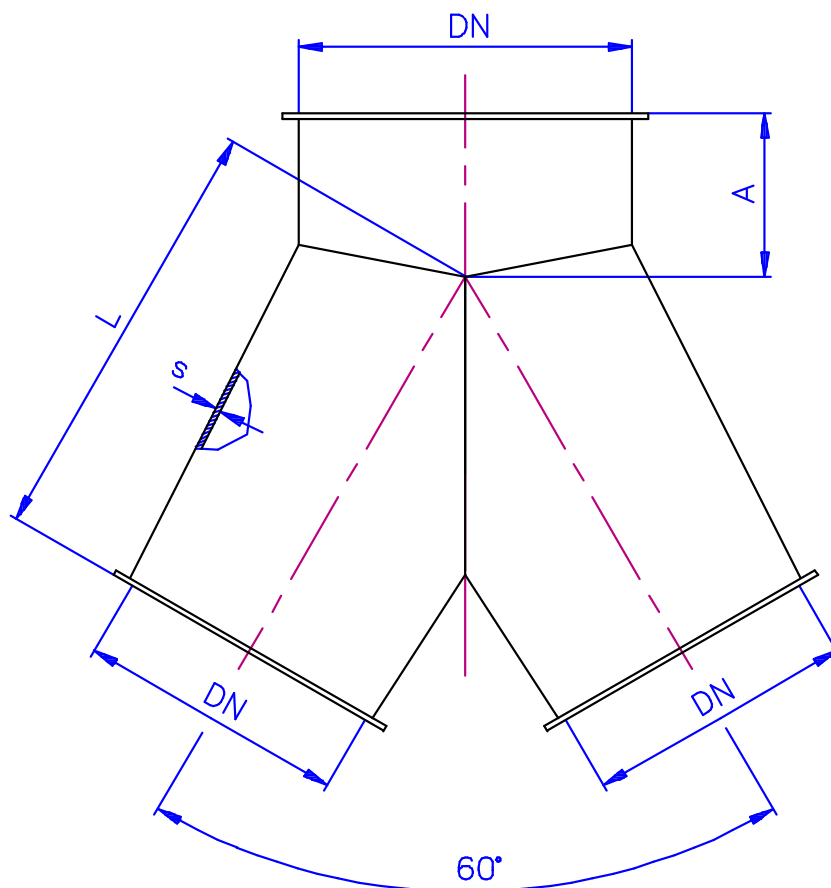

Rury rozwidlone rozdzielają rurociągi o różnych średnicach symetrycznie po kątem 60°.

Konische Hosenrohre verzweigen Rohrleitungen unterschiedlicher Nennweiten symmetrisch im Winkel von 60°.

dN / DN	s	A	L	dN / DN	s	A	L
80/100	1	40	130	250/350	1	70	300
100/120	1	50	150	250/350	2	70	300
100/120	2	50	150	250/350	3	70	300
120/150	1	50	170	300/400	1	70	350
120/150	2	50	170	300/400	2	70	350
150/175	1	50	200	300/400	3	70	350
150/175	2	50	200	350/450	1	80	400
150/175	3	50	200	350/450	2	80	400
150/200	1	60	200	350/450	3	80	400
150/200	2	60	200	400/500	1	90	450
150/200	3	60	200	400/500	2	90	450
200/250	1	60	250	400/500	3	90	450
200/250	2	60	250	500/600	1	100	500
200/250	3	60	250	500/600	2	100	500
250/300	1	70	300	500/600	3	100	500
250/300	2	70	300				
250/300	3	70	300				